



FESTOON LIGHTING



Cable options



Rubber or PVC




PVC



Rubber or PVC

Fitted with either BC or ES lampholders rated at IP55.

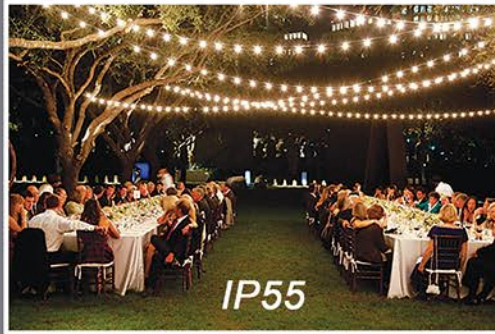

IP55



IP55



IP55

All our festoons are heavy duty, rated at IP55, and can be used on any voltage from 24V - 230Vac. For both indoor and outdoor use.

LONG FESTOONS

Pt no.	L/H	Spacing	Length
--------	-----	---------	--------

T8001	100	1.0m	100m
T8002	200	0.5m	100m
T8003	300	0.33m	100m
T8004	400	0.25m	100m
T8002A	100	0.5m	50m
T8002B	50	0.5m	25m

All with 1m lead in as standard. No plug fitted unless requested.

SHORTER FESTOONS

Pt no.	L/H	Spacing	Length
--------	-----	---------	--------

T8021	10	0.75m	9.9m
T8023	20	1.0m	22.1m
T8024	20	0.5m	12.7m
T8025	50	0.5m	28.0m
T8026	50	1.0m	52.2m
T8027	40	0.5m	22.6m
T8028	140	0.33m	49.0m

All fitted with 3m lead-in plus fused BS plug (except T8028) plus a set of mounting hooks.

(lamps are extra - see P13)

For use with 24V or 110V lamps see transformer collection on P14.

For special lengths and spacings call the office for a quotation.

